


6-FM-65A

FM Series
For General Use

PalPower/KStar

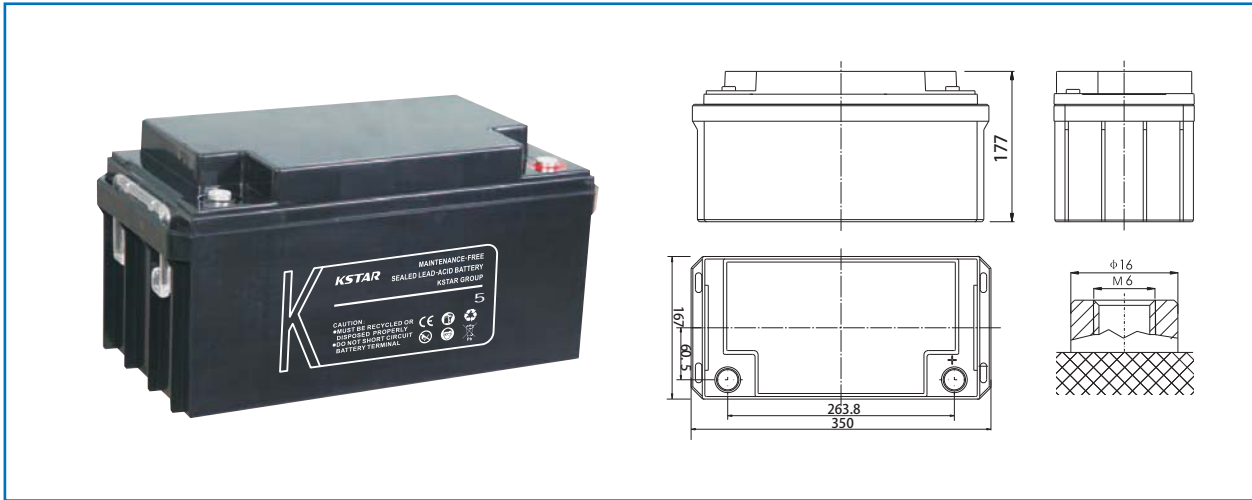


Specifications

Nominal Voltage	12V	
Rated Capacity (20 hour rate)	65Ah	
Dimensions	Total Height (with terminals)	6.97 inches(177mm)
	Height	6.97 inches(177mm)
	length	13.8 inches(350mm)
	width	6.57 inches(167mm)
Weight	Approx.44.0 Pound(20.0kg)	


Characteristics

Capacity 77°F(25°C)	20 hour rate (3.25A)	65 Ah
	10 hour rate (6.10A)	61 Ah
	5 hour rate (10.4A)	52 Ah
	1hour rate (39.0A)	39 Ah
	15Minute Rate (107A)	26.8 Ah
Internal Resistance	Full charged Battery 77°F(25°C)	7.5 MΩ
Capacity affected by Temperature (20hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	81%
	Capacity after 12 month storage	60%
Max. Discharge Current 77°F(25°C)	650A(5S)	
Terminal	M2 / B5 / B11	
Charge (Constant Voltage)	Cycle	Initial Charging Current less than 19.5A Voltage 14.4~14.7 V / 77°F(25°C)
	Float	Voltage 13.5~13.8V / 77°F(25°C)

Discharge Curves 77°F(25°C)

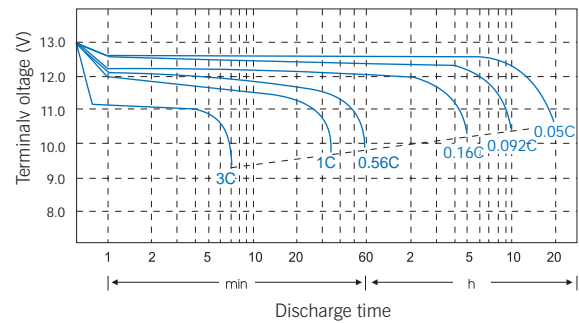

Relationship between charge voltage and temperature

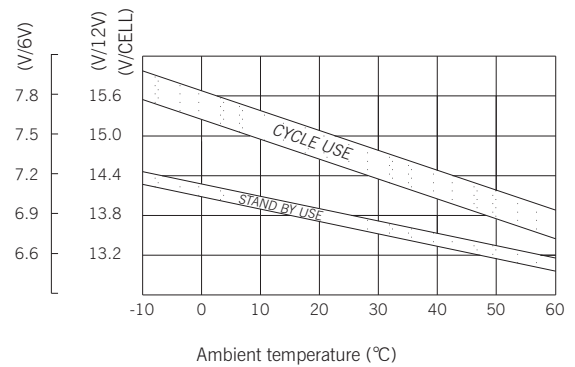

Constant Current Discharge (AMPERES @25°C)


F.V/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.65	197	140	106	68.2	51.7	35.0	24.4	16.6	11.3	6.53	2.85
1.70	184	133	101	64.8	48.8	34.1	23.5	16.3	10.9	6.26	2.78
1.80	146	112	88.4	54	46.1	33.6	22.5	15.3	10.5	5.98	2.72

Constant Power Discharge (WATTS PER CELL@25°C)


Cut off voltage V/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h	10h	24h
1.60	359	254	194	127	95.2	77.2	45.3	31.8	20.9	11.8	5.35
1.65	343	251	192	124	94.3	76.4	44.7	31.5	20.7	11.6	5.33
1.67	341	250	190	123	92.9	75.6	44.2	31.4	20.6	11.5	5.31
1.70	328	246	187	121	91.5	75.0	43.6	31.2	20.3	11.3	5.29
1.75	305	230	182	111	90.0	74.8	43.1	30.8	20.1	11.20	5.27
1.80	273	214	170	104	89.0	74.4	42.4	30.1	20.0	11.00	5.25
1.85	219	177	149	96.0	82.1	69.2	41.4	29.7	19.1	10.90	4.95

eo era in en iron en e era rea o e 0°C s o l ea oi e er lon er sora e e a er a al a ai o l
e less an era e a ai . F ll a ai ill eo aine ro se eral ar e is ar e les.
o e e lon es lie S a er s o l e ll ar e e ore sora e.


Cycle service life in relation to depth of discharge

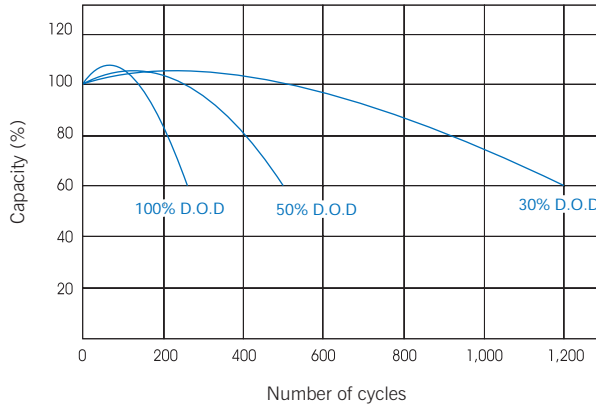


Constant voltage charge characteristic

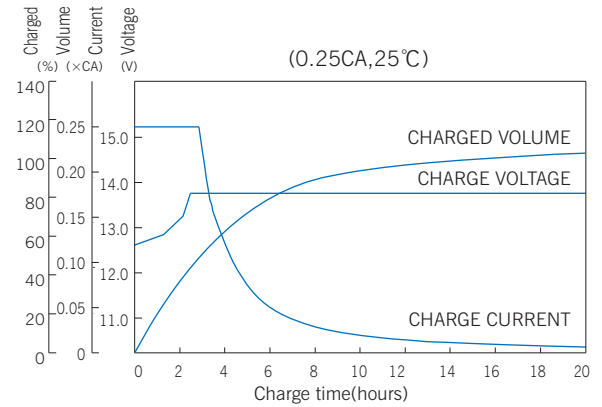


Self-Discharge Characteristics

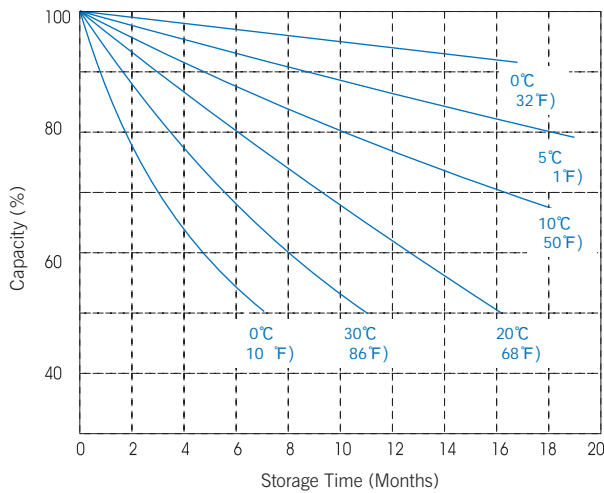


Relationship of OCV and Residual Capacity % (25°C)

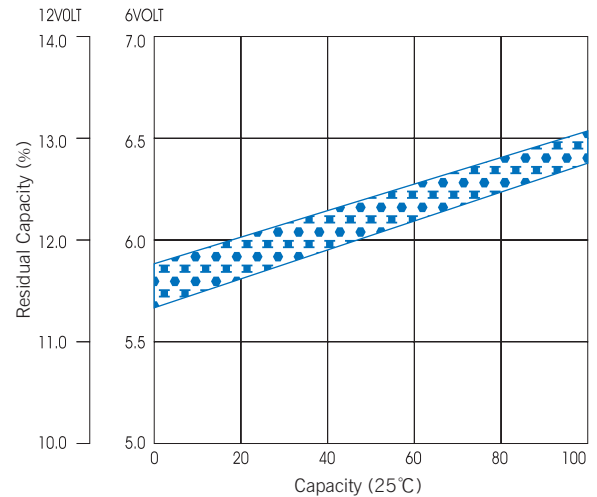

Temperature effects on capacity

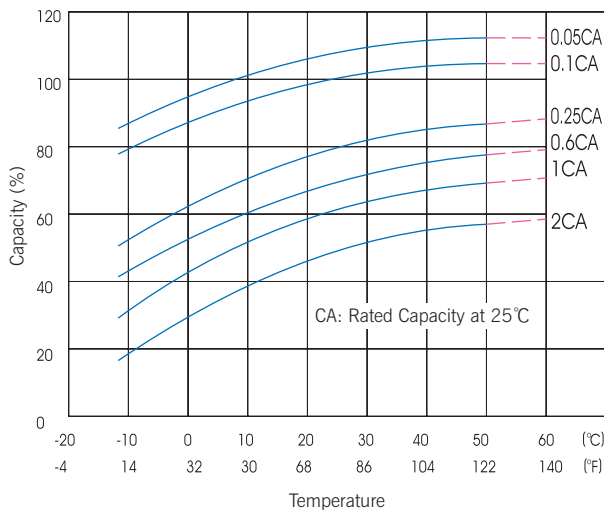

Temperature effects float life

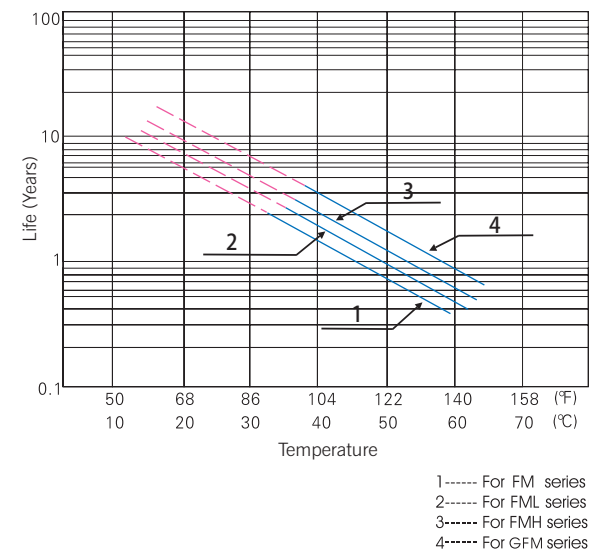

1----- For FM series
2----- For FML series
3----- For FMH series
4----- For GMF series